

NAC2012-Hxx



Noliac plate stack actuator NAC2012-Hxx (height in mm – Hxx) is based on the multilayer actuator NAC2012 and can be stacked to match your requirements. The standard range of NAC2012-Hxx is produced in a height between 4-30 mm. The plate stack provides a stroke up to 43.89 μm and blocking force up to 378 N depending on the height of the stack.


SPECIFICATIONS

Attributes	Value	Tolerance
Length / outer diameter	3 mm	+0.30/-0.10 mm
Width / inner diameter	3 mm	+0.30/-0.10 mm
Max width / outer diameter max	4.8 mm	
Height	4 — 30 mm	+/-0.2 mm or 1% (whichever is largest)
Operating voltage, max.	150 V	
Free stroke, max.	3.14 — 43.89 μm	+/- 15%
Blocking force, max.	378 N	+/-20%
Capacitance	59-820 nF	+/- 15%
Stiffness	121-9 N/μm	+/-20%
Maximum operating temperature	150 °C	
Material	NCE51F	
Unloaded resonance frequency	>248 k - 35 k Hz	
Electrodes	Screen-printed Ag and soldered bus wire (option: glued connections)	

Stack options

Height	Stroke	Capacitance
4 mm	3.1 μm	60 nF
6 mm	6.3 μm	120 nF
8 mm	9.4 μm	190 nF
10 mm	12.5 μm	250 nF

12 mm	15.7 μm	310 nF
14 mm	18.8 μm	370 nF
16 mm	21.9 μm	430 nF
18 mm	25.1 μm	490 nF
20 mm	28.2 μm	560 nF
22 mm	31.4 μm	620 nF
24 mm	34.5 μm	680 nF
26 mm	37.6 μm	740 nF
28 mm	40.8 μm	800 nF
30 mm	43.9 μm	860 nF

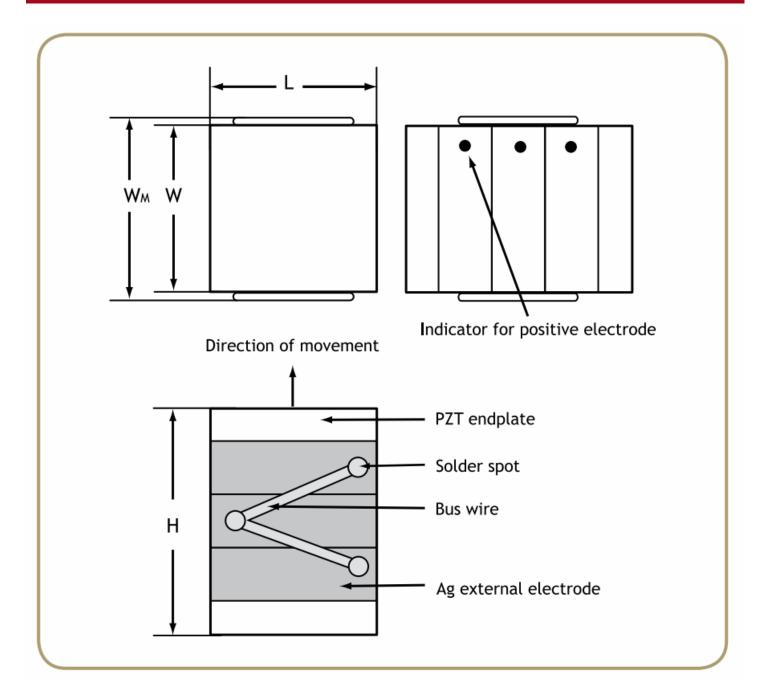

MOUNT AND CONNECT

Mounting

The actuators are usually grinded on top and bottom surfaces (perpendicular to the direction of expansion) in order to obtain parallel surfaces for mounting. The actuators may be mounted either by mechanical clamping or gluing.

Avoiding short circuit can either be achieved by:

- Adding Kapton foil on the metallic surfaces.
- Having inactive ceramic plates between the actuator and the metal plate.
- Stacked actuators are manufactured with top and bottom insulating ceramic end-plates.


If glued, it is important to ensure a very thin glue line between the actuator and the substrate. It is recommended that a presapplied during the curing process.

To avoid significant loss of performance, the mounting of the actuators should avoid mechanical clamping and/or gluing on the actuator.


During manufacturing or handling, minor chips on the end-plates can appear. Minor chips cannot be avoided, but such chips performance.

Electrical connection


The actuators may only be stressed axially. Tilting and shearing forces must be avoided.

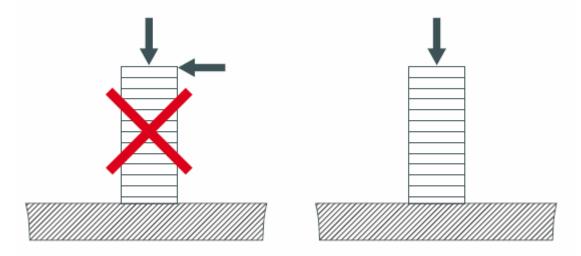


The actuators without preload are sensitive to pulling forces. It is recommended to apply a pre-load in order to optimize the performances of the actuators.

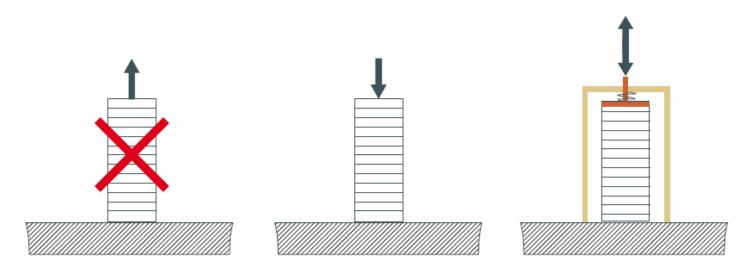


For linear actuators it is recommended not to use a metal plate on top and bottom in order to avoid short circuit.



The force must be applied on the full surface of the actuator in order to assure a good load distribution.

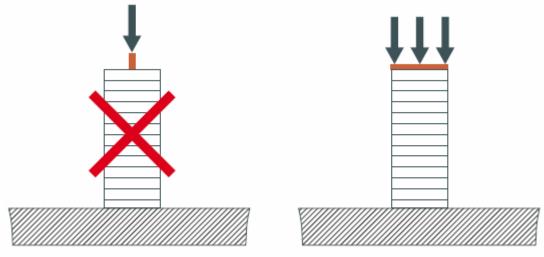

Epoxy glues are well suited for gluing piezoceramics.

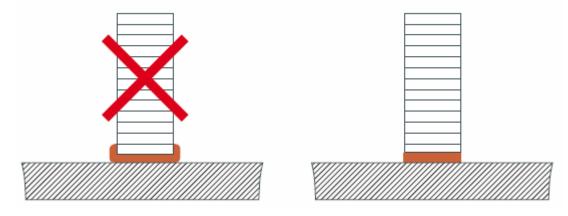

WIRES

When you order actuators from Noliac, you can have wires fitted to save time and money. However, you should consider these parameters, when you select a wire for connection:

- Operation voltageIntensity of current
- Operating temperature
- Environment for example vacuum

We recommend Teflon wires


Teflon wires can stand temperatures above 200 °C, whereas PVC wires only resist temperatures up to 80 ^oC. In tough operating conditions or in vacuum, it is recommended always to use Teflon isolated wire to guarantee the proper performance of PZT-elements.


Wire thickness (AWG)

The wire thickness (AWG) is determined by the current that has to be transmitted to and from the PZT-element. The required current is determined by the capacitance of the PZT-element, the maximum driving frequency and the maximum voltage Up-p.

	Option A01	Option A02	Option C
Туре	28 AWG Teflon	28 AWG Teflon	Custom
Length	200 +/- 10mm	200 +/- 10mm	To be defined
Position	Middle of the actuator	Middle of the actuator	To be defined
Direction	Perpendicular to the height	Toward top	To be defined

Type A01





Type A02

