


Specifications

- **Open-loop stroke: 270 μm @ 150V (fixed-free)**
*Tolerance value: 216~324 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.09 N/ μm**
 - **Resonance frequency(fixed-free): 650 Hz**
*Tolerance value: 520~780 Hz
 - **Blocked force: 25 N** (*Tolerance value: 20~30N)
 - **Capacitance: 0.85 μF**
 - **Dimension: 22x8x8 mm**
 - **Mechanical interface: 2-M2.0 Tapped hole at both sides**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 6.0 g**
- *All dimensions and specifications stated are nominal.

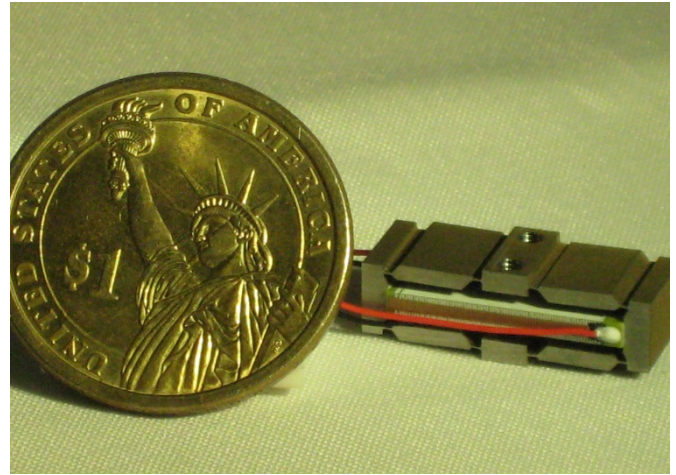

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

