


Specifications

- **Open-loop stroke: 800 μm @ 200V (fixed-free)**
*Tolerance value: 640~960 μm
 - **Operating voltage: -20 V ~ +200 V**
 - **Stiffness in motion direction: 0.11 N/ μm**
 - **Resonance frequency(fixed-free): 280 Hz**
*Tolerance value: 220~340 Hz
 - **Blocked force: 90 N** (*Tolerance value: 70~110N)
 - **Capacitance: 3.2 μF**
 - **Dimension: 52x16x16 mm**
 - **Mechanical interface: 2-M3 Tapped hole at both sides**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 48 g**
- *All dimensions and specifications stated are nominal.

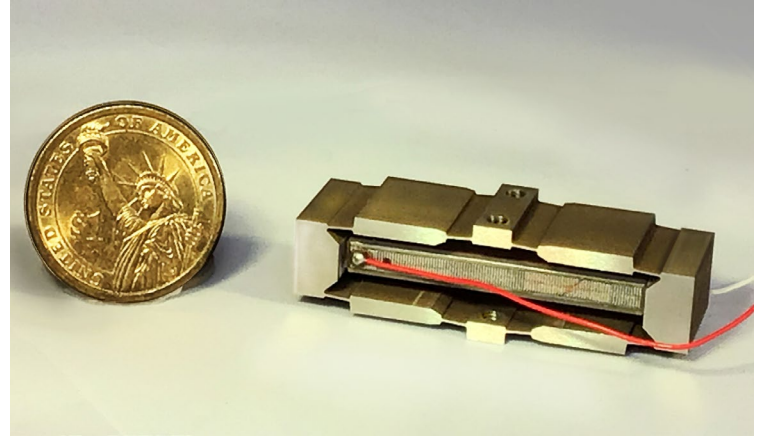

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

